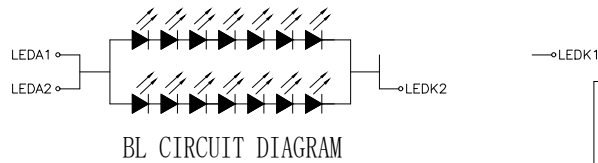




Pin	Name
1	NC
2	VDD
3	VDD
4	NC
5	RESET
6	STBYB
7	GND
8	RXINO-
9	RXINO+
10	GND
11	RXIN1-
12	RXIN1+
13	GND
14	RXIN2-
15	RXIN2+
16	GND
17	RXCLKIN-
18	RXCLKIN+
19	GND
20	RXIN3-
21	RXIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	SELB
29	NC
30	GND
31	LED-
32	LED-
33	L/R
34	U/D
35	XR
36	YD
37	XL
38	YU
39	LED+
40	LED+

Display Type	IPS/NORMAL BLACK/Transmissive
Display Resolution	1024*(RGB)*600
Viewing Direction	FULL
LCD Controller/Driver	JD9168
Logic Voltage	3.3V
Operation Temperature	-20°C TO 70°C
Storage Temperature	-30°C TO 80°C
Backlight	White LED Backlight(14PCS-WHITE LED) Vf = 18.2V~22.4V, If =20mA Brightness = 900cd/m2(Typ)
Remark	



REV	Revision content description	Date
01	FIRST ISSUE	2021.11.04

 <b>LCD WORLD LIMITED</b>					
TOLERANCE(公差)		Mod.Name			
TOLERANCE UNLESS OTHERWISE SPECIFIED		X.X±0.3		LW038JFLN1-01	
X.XX±0.2		DESIGNED(structure)		DESIGNED(electron)	
UNIT		DESIGNED		APPROVED	
mm				DRAWING NAME	
				<b>ASSEMBLE</b>	