



LCM PIN	
1	LED_K
2	LED_A
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DOTCLK
31	DISP
32	HSYNC
33	VSYNC
34	DEN
35	NC
36	GND
37	XR(NC)
38	YD(NC)
39	XL(NC)
40	YU(NC)

Display Type	TN/NORMAL WHITE/TRANSMISSIVE
Display Resolution	480*(RGB)*272
Viewing Direction	12:00(6:00 Gray cale Inversion)
LCD Controller/Driver	ST7282
Logic Voltage	3.3V
Operation Temperature	-20°C TO 70°C
Storage Temperature	-30°C TO 80°C
Backlight Speciality	White LED Backlight(10PCS-WHITE LED) Vf = 16V(Typ), If = 40mA(Typ) Brightness = 500cd/m2(Typ)
Remark	

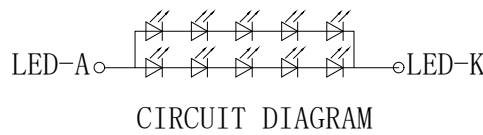

REV	Revision content description	Date
01	FIRST ISSUE	2019.12.12

 <b>LCD WORLD LIMITED</b>			
TOLERANCE(公差)		Mod.Name	
TOLERANCE UNLESS OTHERWISE SPECIFIED		LW043DURN5-04	
X.X±0.3		OTHERWISE SPECIFIED X.XX±0.2	
UNIT	DESIGNED(structure)	DESIGNED(electron)	APPROVED
mm			
			DRAWING NAME
			ASSEMBLE