
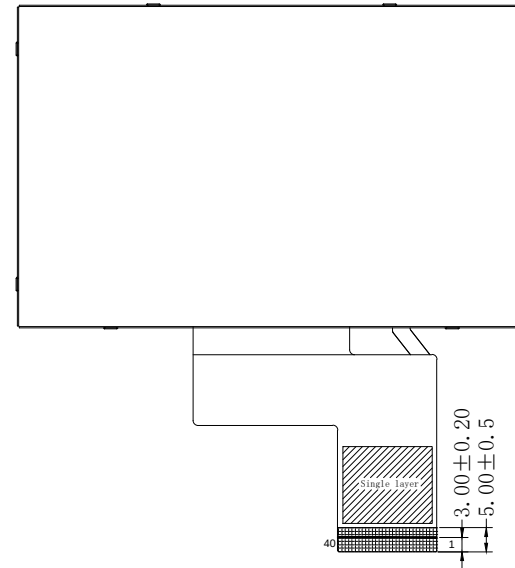
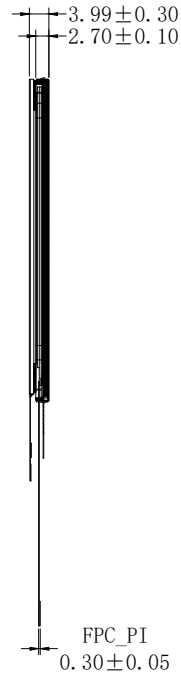


FRONT VIEW

SIDE VIEW


REAR VIEW

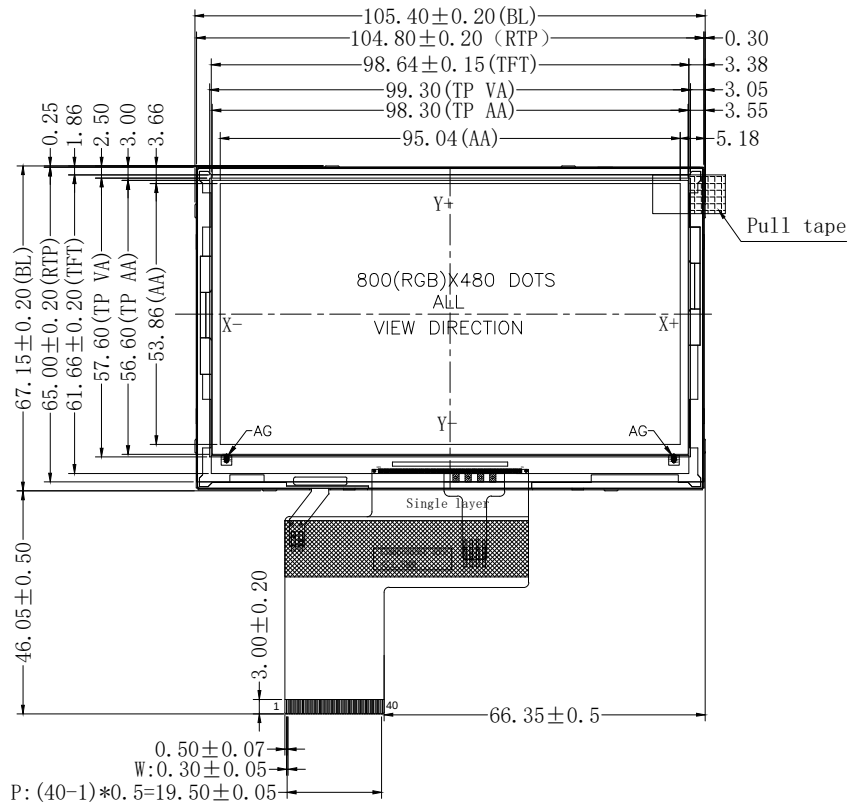


FPC INTERFACE

1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	HSYNC
33	VSYN
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

Display Type	IPS/NORMAL Black/Transmissive
Display Resolution	800*(RGB)*480
Viewing Direction	Full
LCD Controller/Driver	ST7262E43-G4
Logic Voltage	2.8V
Operation Temperature	-20°C TO 70°C
Storage Temperature	-30°C TO 80°C
Backlight	White LED Backlight(16PCS-WHITE LED) Vf = 22.4V~25.6V, If =40mA Luminance = 500cd/m2(Typ)
Remark	



Note: The TFT has not upper metal bezel

		LCD WORLD LIMITED			
TOLERANCE(公差)		Mod.Name			
TOLERANCE UNLESS OTHERWISE SPECIFIED X.X±0.3 X.XX±0.2		LW043GFRR3-01			
UNIT	DESIGNED(structure)	DESIGNED(electron)	APPROVED	DRAWING NAME	
mm				ASSEMBLE	

REV	Revision content description	Date
01	FIRST ISSUE	2022.03.03