

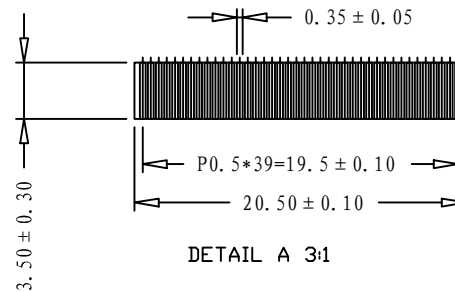
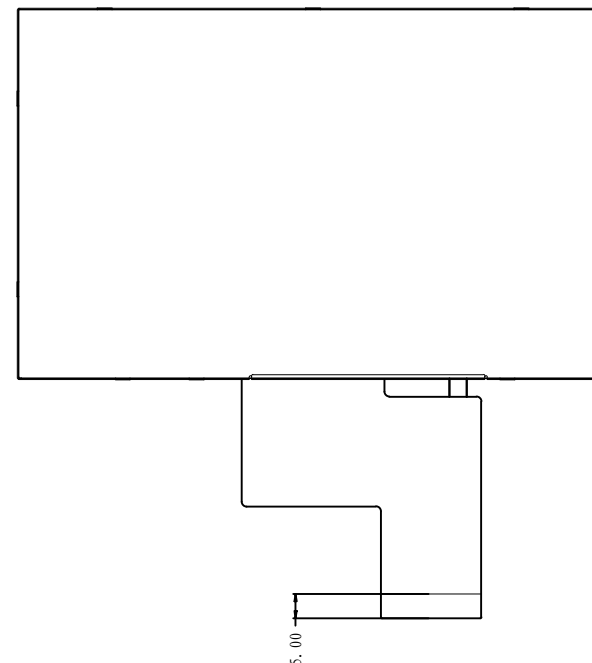


1	LED_K
2	LED_A
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DOTCLK
31	DISP
32	HSYNC
33	VSYNC
34	DEN
35	NC
36	GND
37	XR(NC)
38	YD(NC)
39	XL(NC)
40	YU(NC)

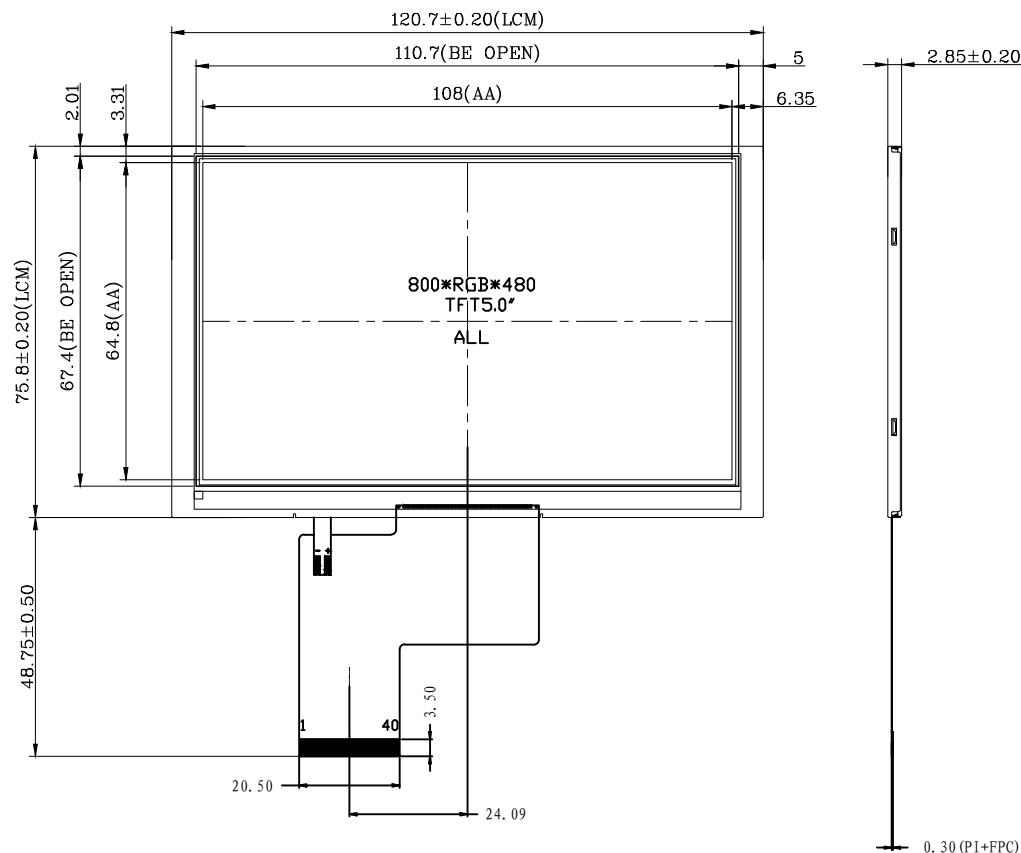

BL CIRCUIT DIAGRAM 40mA, VF=19.2V (TYP)
Brightness: 300cd/m2

NOTE:
1.LCD TYPE: 5.0" TFT
2.LCD IC: ST7262
3.VIEING DIRECTION: ALL
4.BACKLIGHT: 6s2p CHIPS WHITE LED
5.OPERATON TEMP: -20℃ ~70℃
6.STORAGE TEMP: -30℃ ~80℃
7.GENERA TOLERANCE: ±0.2
8.Connector: FH19-40S-05SH(51)

		LCD WORLD LIMITED		SCALE	SHEET
				FIT	1/1
TOLERANCE (公差)		Mod. Name			
TOLERANCE UNLESS OTHERWISE SPECIFIED		LW050GFRN2-01			
UNIT	DESIGNED (structure)	DESIGNED (electron)	APPROVED	DRAWING NAME	
mm				ASSEMBLY	

01	FIRST ISSUE	2019.11.07