



1	LED_K
2	LED_A
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DOTCLK
31	DISP
32	H SYNC
33	V SYNC
34	DEN
35	NC
36	GND
37	XR(NG)
38	YD(NG)
39	XL(NG)
40	YU(NG)


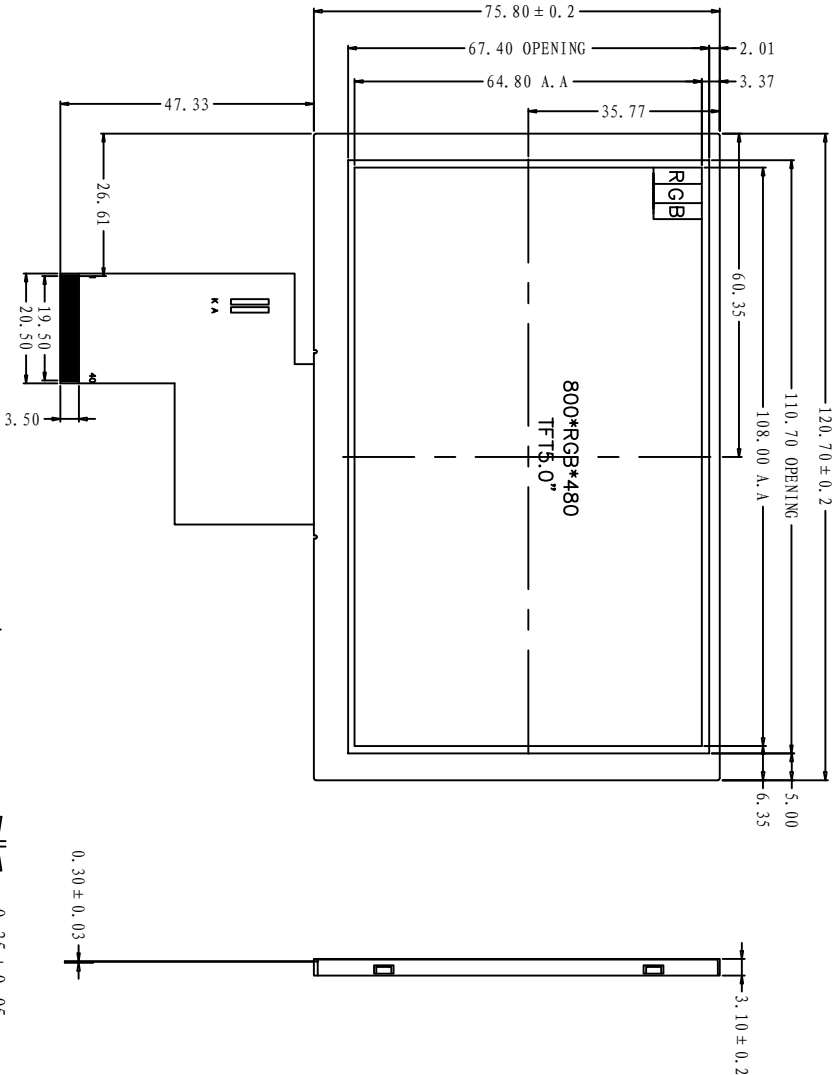


- NOTE:
1. LCD TYPE:
5.0" TFT
ILI6122 + ILI5960
 2. LCD IC:
12 0' CLOCK
 3. VIEWING DIRECTION:
6X3 CHIPS WHITE LED
 4. BACKLIGHT:
60mA/19.2V (Type)

5. LUMINANCE:
900CD/M2
6. OPERATON TEMP:
-20°C ~ 70°C
7. STORAGE TEMP:
-30°C ~ 80°C
8. GENERA TOLERANCE:
±0.2
9. Compliant ROHS

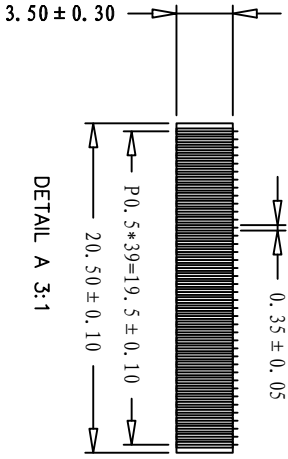

BL CIRCUIT DIAGRAM



REV	Revision content description	Date
V01	FIRST ISSUE	2018.01.08

		LCD WORLD LIMITED	
TOLERANCE(公差)		Mod.Name	
TOLERANCE UNLESS OTHERWISE SPECIFIED		X.X±0.3 X.XX±0.2	
UNIT		DESIGNED(structure)	APPROVED
mm			
		DRAWING NAME	
		ASSEMBLE	