



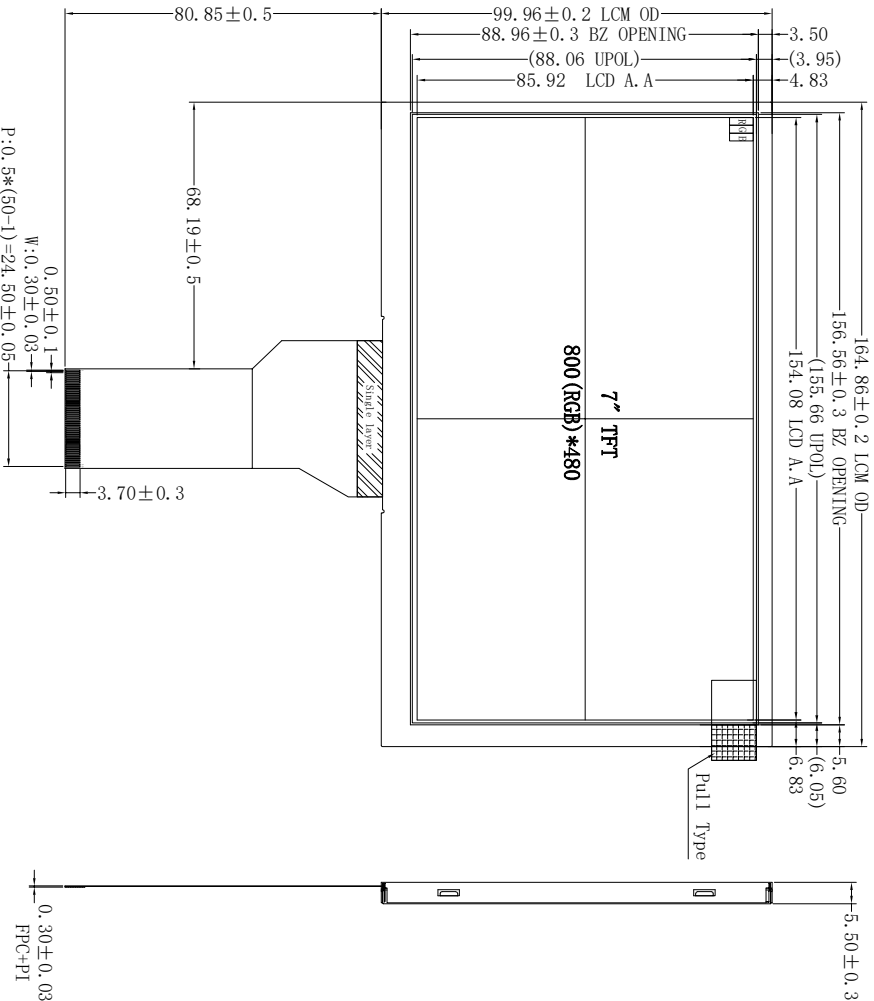


0.30±0.03
FPC+PI

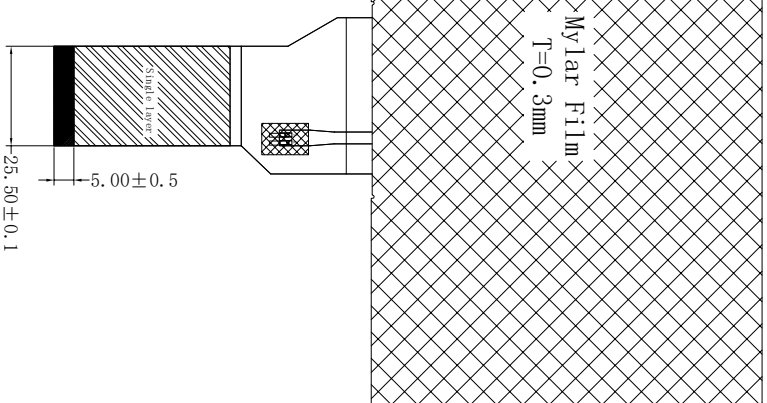

2	LED
3	LEK
4	LEK
5	GND
6	VCOM
7	DVDD
8	MODE
9	DE
10	VS
11	HS
12	H7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	DLK
38	GND
39	SHLR
40	L/D
41	VGH
42	VCL
43	AVDD
44	RESET
45	NC
46	VCOM
47	DTTB
48	GND
49	NC
50	NC

Display Type	TN Normally White Transmissive
Display Resolution	800(RGB)X480
Viewing Direction	12:00 (6:00 Gray Scale Inversion)
LCD Controller/Driver	EK9713CA/EK73002ACGB
Logic Voltage	3.3V
Operation Temperature	-20℃ TO 70℃
Storage Temperature	-30℃ TO 80℃
Backlight Speciality	White LED Backlight(24PCS-WHITE LED) Vf = 8.4V~9.6V, If = 160mA(Typ) Brightness = 350cd/m2(Typ)
Remark	

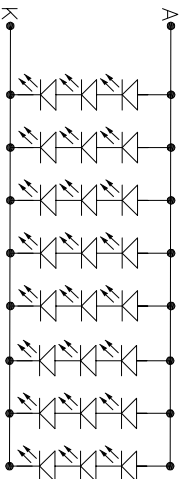

Backlight Circuit

REV	Revision content description	Date
01	FIRST ISSUE	2021.08.02

1. png	Mod.Name	
TOLERANCE(公差)		
TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X±0.3	LW070GURN3-07
UNIT	DESIGNED(structure)	DESIGNED(election)
mm		APPROVED
		DRAWING NAME
		ASSEMBLY