




FRONT VIEW

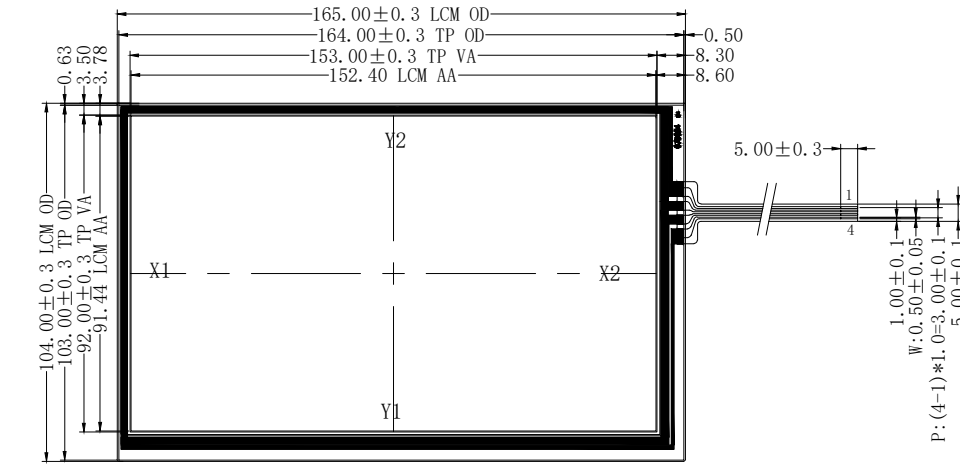

SIDE VIEW

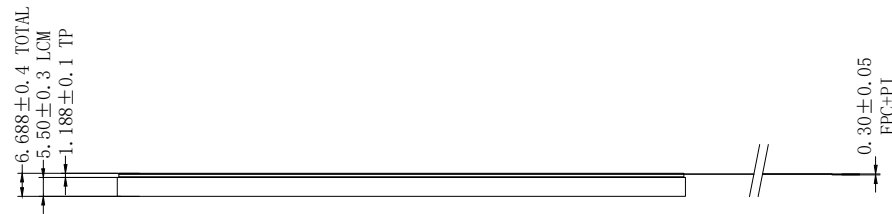

REAR VIEW

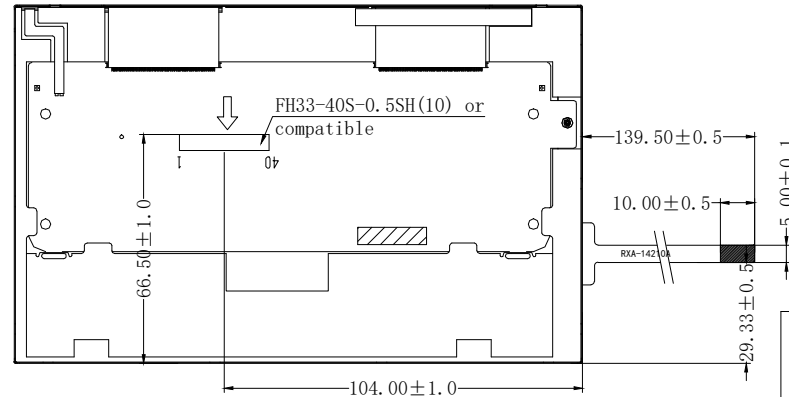

RTP:

1. Type: Film to Glass
2. Operating Voltage: DC5V
3. operation Temperature: -20℃~70℃
Storage Temperature: -30℃~80℃
4. Life Time: ≥1,000,000 times
5. Connect Material: FPC
6. Response Time: ≤10ms
7. Linearity: ≤1.5%
8. Transmittance: ≥75%
9. Surface Hardness ≥3H(Pencil)
10. operation force: 50g~120g
11. insulation resistance: ≥20MΩ, 25V (DC)
12. Resistance:
X: 400Ω~900Ω
Y: 140Ω~560Ω
13. Unspecified Tolerance: ±0.20

Note:

Setting of scan control input		Scanning direction
U/D	L/R	
GND	VCC	Up to down, left to right
VCC	GND	Down to up, right to left
GND	GND	Up to down, right to left
VCC	VCC	Down to up, left to right

RTP PIN:

NO.	SYMBOL
1	Y2
2	X2
3	Y1
4	X1

Display Type	TN/NORMAL WHITE/TRANSMISSIVE
Display Resolution	800*(RGB)*480
Viewing Driection	12:00 O'Clock
LCD Controller/Driver	
Logic Voltage	3.3V
Operation Temperature	-20℃ TO 70℃
Storage Temperature	-30℃ TO 80℃
Backlight	Backlight driver Vf = 5V, If = 500mA(Typ), 550mA(Max) Brightness = 220cd/m2(Typ)
Remark	

REV	Revision content description	Date
01	FIRST ISSUE	2021.11.01

		LCD WORLD LIMITED	
TOLERANCE(公差)		Mod.Name	
TOLERANCE UNLESS X.X±0.3 OTHERWISE SPECIFIED X.XX±0.2		LW070GURR4-01	
UNIT	DESIGNED(structure)	DESIGNED(electron)	APPROVED
mm			
		DRAWING NAME	
		ASSEMBLE	