




FRONT VIEW

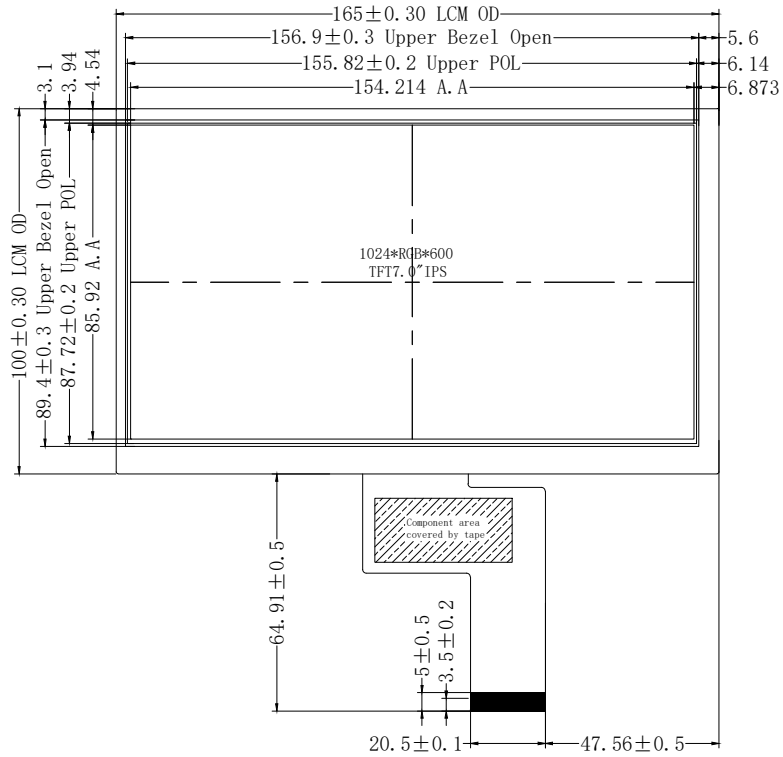


SIDE VIEW

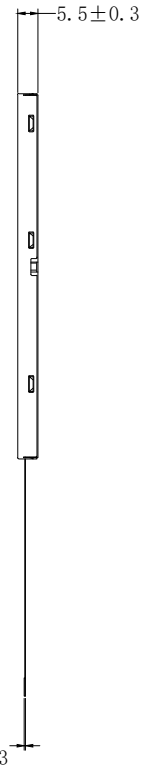



REAR VIEW

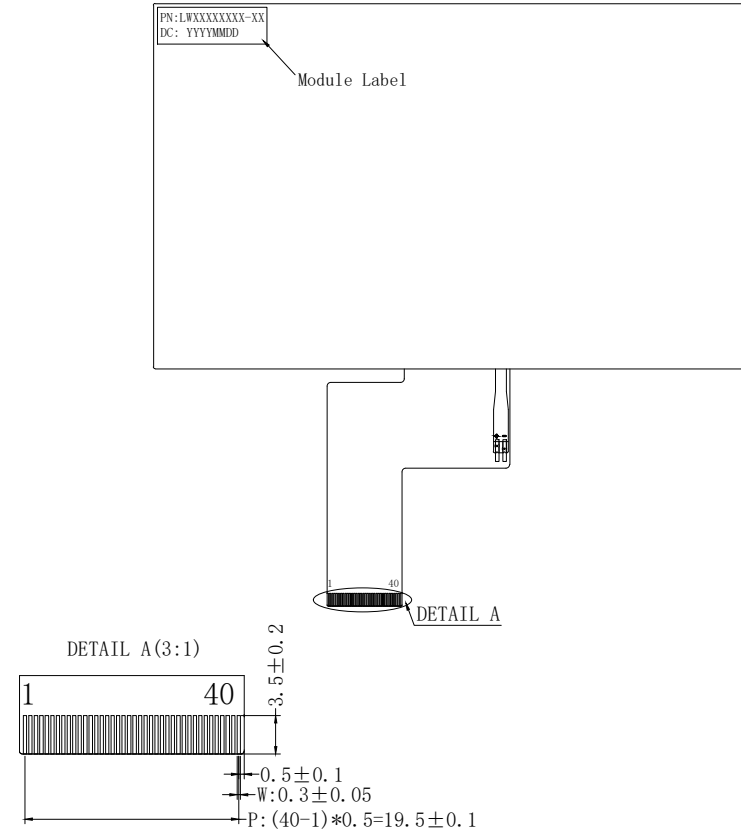

Display Type	IPS/NORMAL BLACK/Transmissive
Display Resolution	1024*(RGB)*600
Viewing Driection	Full
LCD Controller/Driver	HX8282-A11+HX8696-A
Logic Voltage	3.3V
Operation Temperature	-20℃ TO 70℃
Storage Temperature	-30℃ TO 80℃
Backlight	White LED Backlight(27PCS-WHITE LED) Vf = 9.6V(Typ), If =180mA(Typ) Brightness = 500cd/m2(Typ)
Remark	



REV	Revision content description	Date
01	FIRST ISSUE	2021.11.22

 LCD WORLD LIMITED		Mod.Name			
		LW070JFLN2-01			
TOLERANCE (公差)	DESIGNED(structure)		DESIGNED(electron)	APPROVED	DRAWING NAME
TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X±0.3 X.XX±0.2				
UNIT	mm				

1	NC
2	VDD
3	VDD
4	NC
5	RESET
6	NC
7	GND
8	RXIN0-
9	RXIN0+
10	GND
11	RXIN1-
12	RXIN1+
13	GND
14	RXIN2-
15	RXIN2+
16	GND
17	RXCLKIN-
18	RXCLKIN+
19	GND
20	RXIN3-
21	RXIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	NC
29	NC
30	GND
31	LED-
32	LED-
33	NC
34	NC
35	NC
36	NC
37	NC
38	NC
39	LED+
40	LED+