
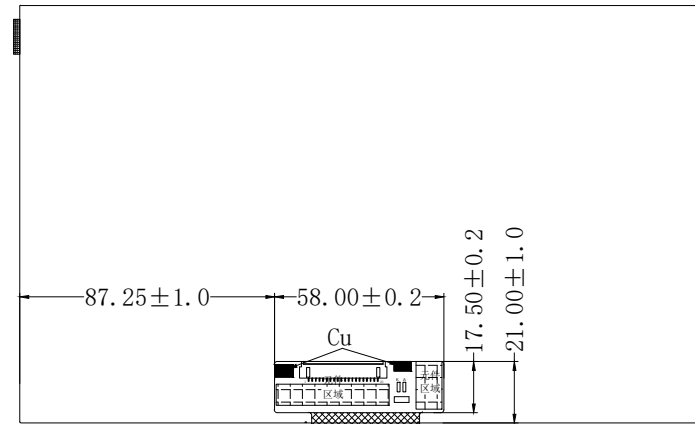


FRONT VIEW

SIDE VIEW


REAR VIEW

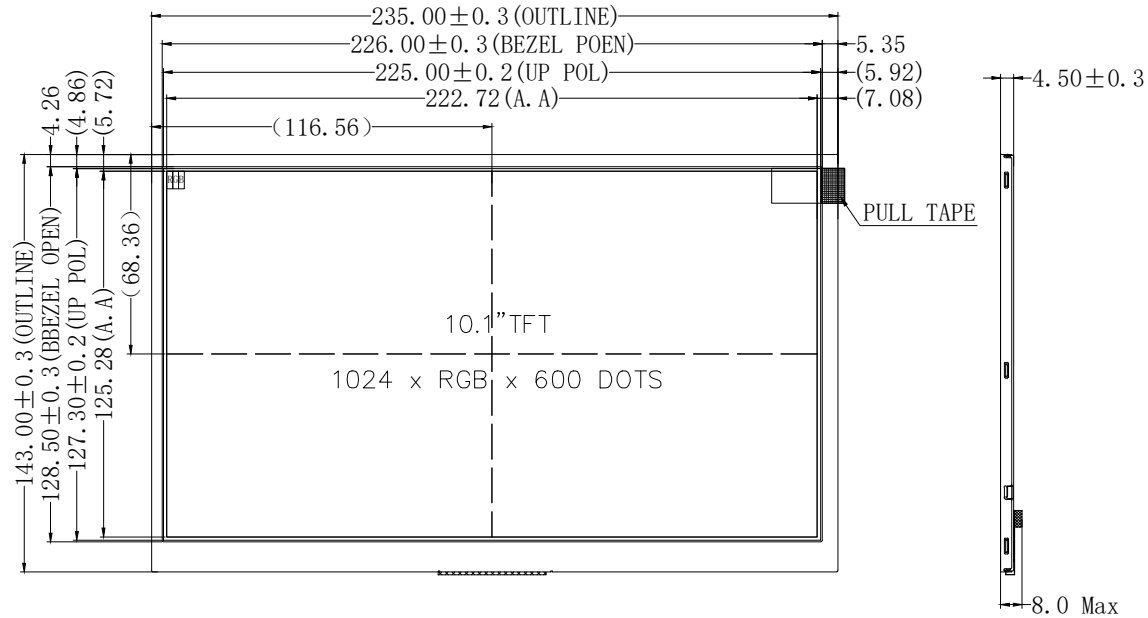

PIN FUCTION	
PIN	SYMBOL
1	VDD (+3.3V)
2	VDD (+3.3V)
3	LED-EN
4	GND
5	RIN0-N
6	RIN0+P
7	GND
8	RIN1-N
9	RIN1+P
10	GND
11	RIN2-N
12	RIN2+P
13	GND
14	CLK-N
15	CLK+P
16	GND
17	RIN3-N
18	RIN3+P
19	PWM
20	VLED (+5V)

Display Type	TN/NORMAL BLACK/TRANSMISSIVE
Display Resolution	1024*(RGB)*600
Viewing Driection	FULL
LCD Controller/Driver	HX8282-A11
Logic Voltage	3.3V
Operation Temperature	-10℃ TO 60℃
Storage Temperature	-20℃ TO 70℃
Backlight	Backlight driver Vf = 5V(Typ.) Brightness = 450cd/m2(Typ)
Remark	

REV	Revision content description	Date
01	FIRST ISSUE	2021.11.03

		LCD WORLD LIMITED		
TOLERANCE(公差)		Mod.Name		
TOLERANCE UNLESS OTHERWISE SPECIFIED		LW101JFLN1-01		
UNIT	DESIGNED(structure)	DESIGNED(electron)	APPROVED	DRAWING NAME
mm				ASSEMBLE

