

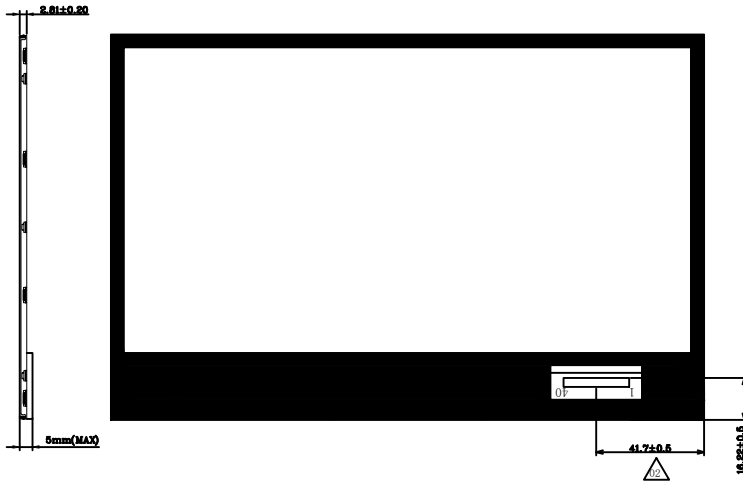


1	NC
2	VDDIN
3	VDDIN
4	VDDIN
5	NC
6	GND
7	GND
8	RINO-
9	RINO+
10	GND
11	RINI-
12	RINI+
13	GND
14	RIN2-
15	RIN2+
16	GND
17	LVDS_CLK-
18	LVDS_CLK+
19	GND
20	RIN3-
21	RIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	GND
29	NC
30	NC
31	LED-
32	LED-
33	LED-
34	NC
35	NC
36	NC
37	NC
38	LED+
39	LED+
40	LED+

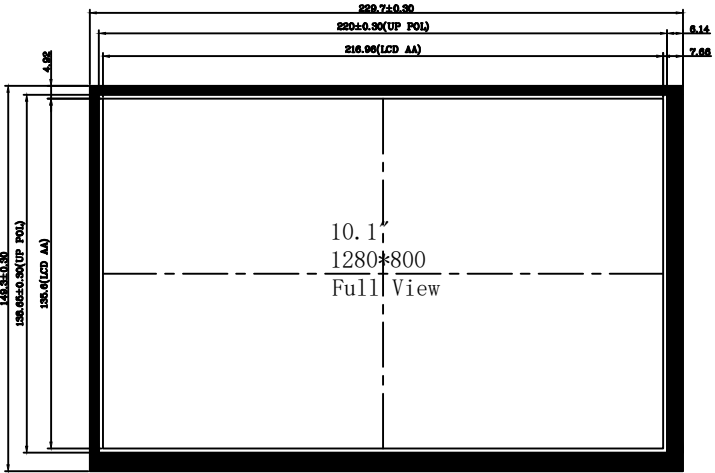

Backlight LED Circuit

NOTES:

- LCD TYPE: 10.1" TFT
- Viewing direction: ALL
- Input voltage: 7.8~10V
- Backlight: White LED(3x14LED)
If=280mA Vf=9.6V(TYPE)
- Luminance:300cd/m2(min),350cd/m2(typ)
- Operating temprature: -20°C ~ +70°C
- Storage temprature: -30°C ~ +80°C
- Request ROHS

01	FIRST ISSUE	2019.05.18
02	Change Connector Position	2019.07.28

			LCD WORLD LIMITED		SCALE	SHEET
					FIT	1/1
TOLERANCE (公差)			Mod. Name			
TOLERANCE UNLESS OTHERWISE SPECIFIED			LW101MFLN6-01			
X. X ± 0. 3 X. XX ± 0. 2						
UNIT	DESIGNED(structure)	DESIGNED(electron)	APPROVED	DRAWING NAME		
mm				ASSEMBLE		