
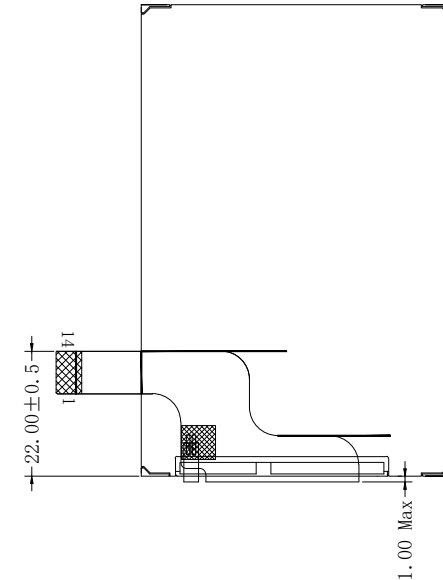
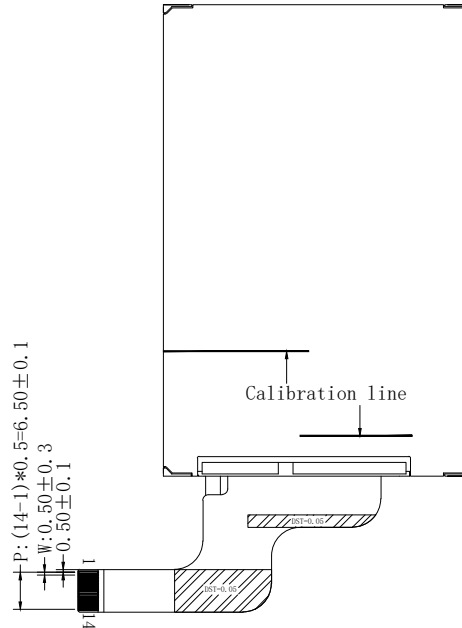


FRONT VIEW


SIDE VIEW

REAR VIEW

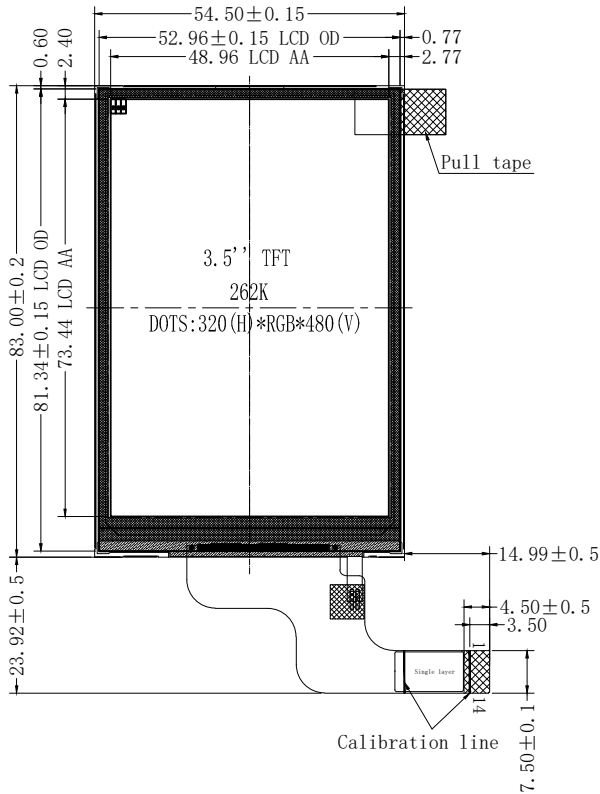

Bending diagram

PIN	DESC
1	GND
2	GND
3	LEDK
4	LEDA
5	GND
6	TE
7	RESET
8	CS
9	SCL
10	RS
11	SDA
12	IOVCC
13	VCC
14	GND



Backlight Circuit

Display Type	TN/NORMAL WHITE/Transmissive
Display Resolution	320*(RGB)*480
Viewing Direction	6:00
LCD Controller/Driver	ST7796S
Logic Voltage	2.8V
Operation Temperature	-20°C TO 70°C
Storage Temperature	-30°C TO 80°C
Backlight	White LED Backlight(6PCS-WHITE LED) Vf = 3.0V~3.2V, If =120mA Brightness = 300cd/m2(Typ)
Remark	

REV	Revision content description	Date
01	FIRST ISSUE	2021.08.30

TOLERANCE(公差)		Mod.Name		
TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X±0.3 X.XX±0.2	LW035EDSN4-01		
UNIT	DESIGNED(structure)	DESIGNED(electron)	APPROVED	DRAWING NAME
mm				ASSEMBLE



LCD WORLD LIMITED