


PIN	SYMBOL
1	LEDA
2	LEDK
3	GND
4	CS
5	D/CX
6	RESET
7	GND
8	DB7
9	DB6
10	DB5
11	DB4
12	GND
13	DB3
14	DB2
15	DB1
16	DB0
17	GND
18	RE
19	WE
20	VDD3.3V
21	NC
22	NC
23	NC
24	NC

Display Type	NORMAL BLACK/Transmissive
Display Resolution	320*(RGB)*480
Viewing Direction	FULL
LCD Controller/Driver	ST7796S
Logic Voltage	2.8V
Operation Temperature	-20°C TO 70°C
Storage Temperature	-30°C TO 80°C
Backlight	White LED Backlight(6PCS-WHITE LED) Vf = 2.8V~3.3V, If =120mA Brightness = 250cd/m2(Typ)
Remark	

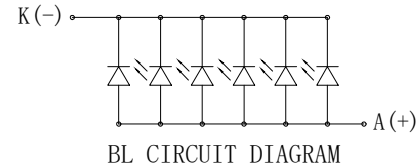

REV	Revision content description	Date
01	FIRST ISSUE	2022.02.21

		TOLERANCE(公差)		Mod.Name	
		TOLERANCE UNLESS OTHERWISE SPECIFIED X.X±0.3 X.XX±0.2		LW035EFUN1-01	
UNIT	DESIGNED(structure)	DESIGNED(electron)	APPROVED	DRAWING NAME	
mm				ASSEMBLE	